

Non Adjustable Balun for Radio

ABI-AC1004

Applications:

Connects a Radio or Tuner to the universal wall outlet via standard coax patchcords PAL (Din 45325) female connector to PAL(Din 45325) male connector




Specifications:

LxWxH [mm]: Weight [Kg]:
52,21x6,733x,2 0,010

- TV Frequency Range (5 MHz - 88 MHz and 108 MHz and higher) Suppressed
- Frequency Range : 88MHz - 108 MHz

- Compliance:
 - DIN 45325 Female
 - EN 50083-2
 - EN 50083-7

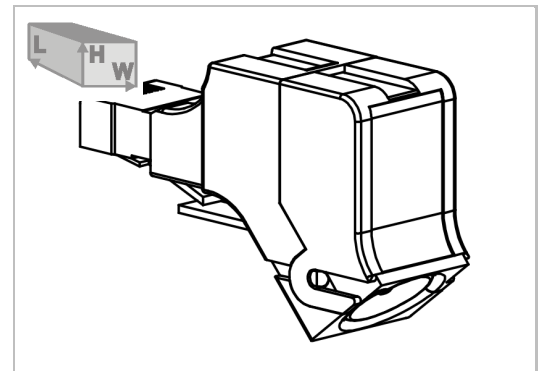

Features:

- Quality Radio everywhere in the home
- Cord runs parallel with the wall for maximal protection
- Efficient screening against electromagnetic influences
- Not suitable for TV. Use ABI-AC1001 / ABI-AC1002 for TV

abitana

www.abitana.com


ABI-AC1004

Non Adjustable Balun for Radio

ABI-AC1004

RB

Typical Application:

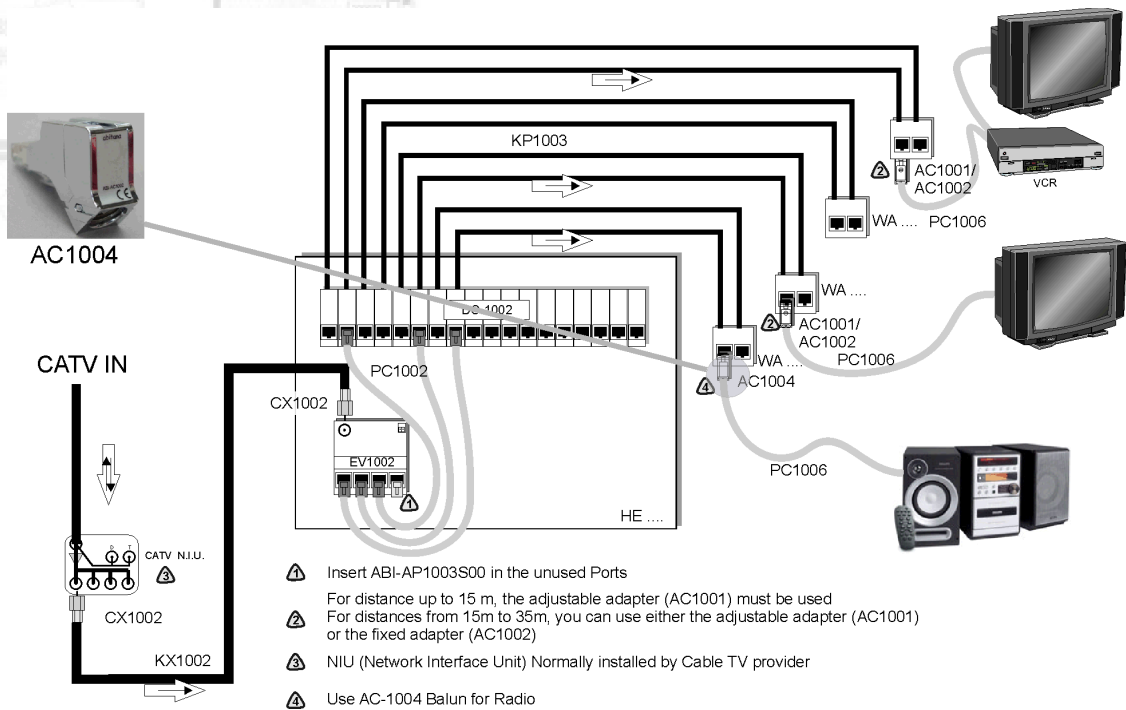

Package:

Reference:	Quantity:	Weight [KG]:	LxWxH [mm]:
• ABI-AC1004S00	1		
• ABI-AC1004M00	12		

ABI-AC1004

abitana